



MINIMUM BLEED VALVES

A-QOVM-100, A-QOVM-125, A-QOVM-125FF

Continental NH3 Products is proud to introduce our all new fast fill minimum bleed riser fill valve. We increased the outlet hole 75 percent, from 3/4" to 1" to match the inlet hole in the nurse tank valve. The minimum bleed feature allows the users to bleed the connection by loosening the coupling instead of using a bleeder valve. This is achieved by locating the seat down by the end of the coupling. This unique feature is very helpful on risers when filling nurse tanks. We use stainless steel for the bonnet, stems, poppet, and coupling nozzle for extended life. The knurled coupling on regular model helps users grip the coupling easier with gloves on and the large handle is great for small and large hands.




FAST FILL A-QOVM-125FF



REGULAR MODEL A-QOVM-100
A-QOVM-125

- **75% Larger outlet hole on the fast fill model**
- **Fast fill model up to 30 to 40 percent faster fill times**
- **1" & 1-1/4" connection size for regular minimum bleed. 1-1/4" for fast fill model**
- **Flat rubber seat makes for an excellent seal**
- **Stainless steel bonnet, stem, poppet and coupling nozzle**
- **Large handle for easy opening**
- **Rugged ductile iron body**
- **Knurled coupling for better grip on regular model**

FAST FILL OUTLET
Actual size

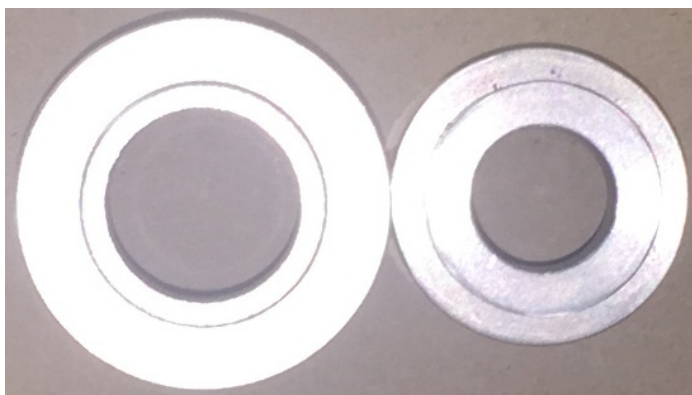

REGULAR OUTLET
Actual size