

2200 SERIES

Don't let the compact design of the Remco Economy Plus 2200 Series diminish the fact that it is hardened and prepared for extreme conditions. This pump proves that big things come in small packages.





PUMP OPTIONS

- > FLUID PORTS: 3/8" HOSE BARB
- VOLTAGE: 12 / 24 VDC
- MATERIALS: VITON / SANTOPRENE / POLY
- > PACKAGING: BULK / RETAIL AVAILABLE
- ➤ INTEGRATED ON/OFF SWITCH AVAILABLE

STANDARD FEATURES

- PROFESSIONAL GRADE QUALITY
- COMPACT AND EFFICIENT DESIGN
- ▶ LOW HEAT AND POWER CONSUMPTION
- > QUIET OPERATION

TYPICAL APPLICATIONS


> AG AND INDUSTRIAL CHEMICAL SPRAYING


Flow

- AUTOMOTIVE FLUID EXCHANGE
- > FOOD AND BEVERAGE SERVICE
- > ICE REMOVAL

PUMP DIMENSIONS

(DIMENSIONS MAY VARY BY MODEL)





Pressure

Controls


OPEN FLOW RANGE: 1.0 GPM

TECHNICAL INFORMATION

- ▶ 18 AWG 6" 2-PIN MOLD / CUSTOM CONNECTION
- > 4FT (1.2M) PRIMING CAPABILITY
- INTERMITTENT DUTY CYCLE
- DRY RUN CAPABILITY
- ➤ 140°F (60°C) MAX LIQUID TEMPERATURE
- ➤ 180°F (82°C) MAX MOTOR TEMPERATURE

PUMP PERFORMANCE

(PERFORMANCE MAY VARY)

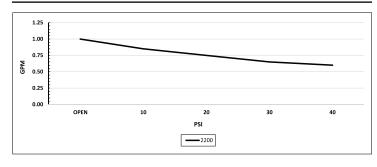

RECOMMENDED PARTS & ACCESSORIES

Diaphragm



901-009-R

Ports

PUMP CONFIGURATIONS

STANDARD Item Number

(ADDITIONAL CONFIGURATIONS AVAILABLE)

2240-1B1-10E	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	12 VDC
ZZ4U-IDI-IUE	1.0 GPW (3.76 LPW)	DEMAND	40 P31 (2.0 DAN)	SAINTUPNEINE	SANTOPHENE	3/0 HUSE DAND	IZ VDC
2240-1B1-20E	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	24 VDC
2240-1B1-10I	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	12 VDC (ON/OFF SWITCH)
DETAIL OPTIONS							
RETAIL OPTIONS							
RETAIL OPTIONS	Flow	Controls	Droccuro	Valves	Dianhragm	Dorte	Voltago
Item Number	Flow	Controls	Pressure	Valves	Diaphragm	Ports	Voltage
	Flow 1.0 GPM (3.78 LPM)	Controls DEMAND	Pressure 40 PSI (2.8 BAR)	Valves SANTOPRENE	Diaphragm SANTOPRENE	Ports 3/8" HOSE BARB	Voltage 12 VDC

Valves





Voltage